


EJEMPLOS DE CURVAS CARACTERÍSTICAS DE LA VÁLVULA DE CONTROL DE DIRECCIÓN PROPORCIONAL


$$\Delta P = 2.9358Q^{2.0179}$$

Q (lts/min)	ΔP (bar)
1,476	6,00
1,740	10,00
2,185	14,00
2,465	18,00
2,847	24,00
3,075	28,00
3,300	32,00
3,436	36,00
3,617	40,00
3,750	42,00

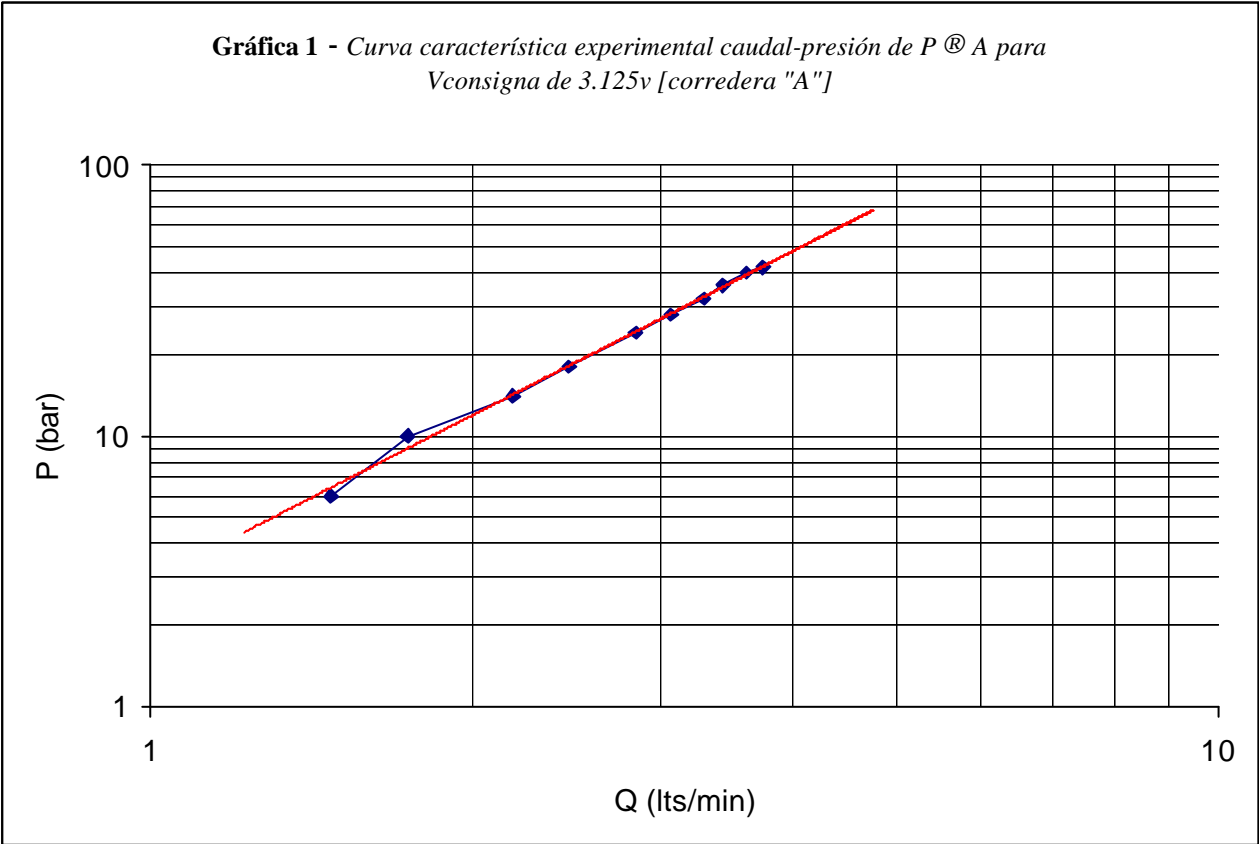


$$\Delta P = 1.3013Q^{2.0148}$$

Q (lts/min)	ΔP (bar)
1,900	5,00
2,186	6,00
2,250	7,00
2,516	8,00
2,616	9,00
2,758	10,00
2,900	11,00
3,021	12,00
3,144	13,00
3,377	15,00
3,750	19,00
4,285	23,00
4,431	27,00
4,805	31,00
5,109	35,00
5,484	41,00

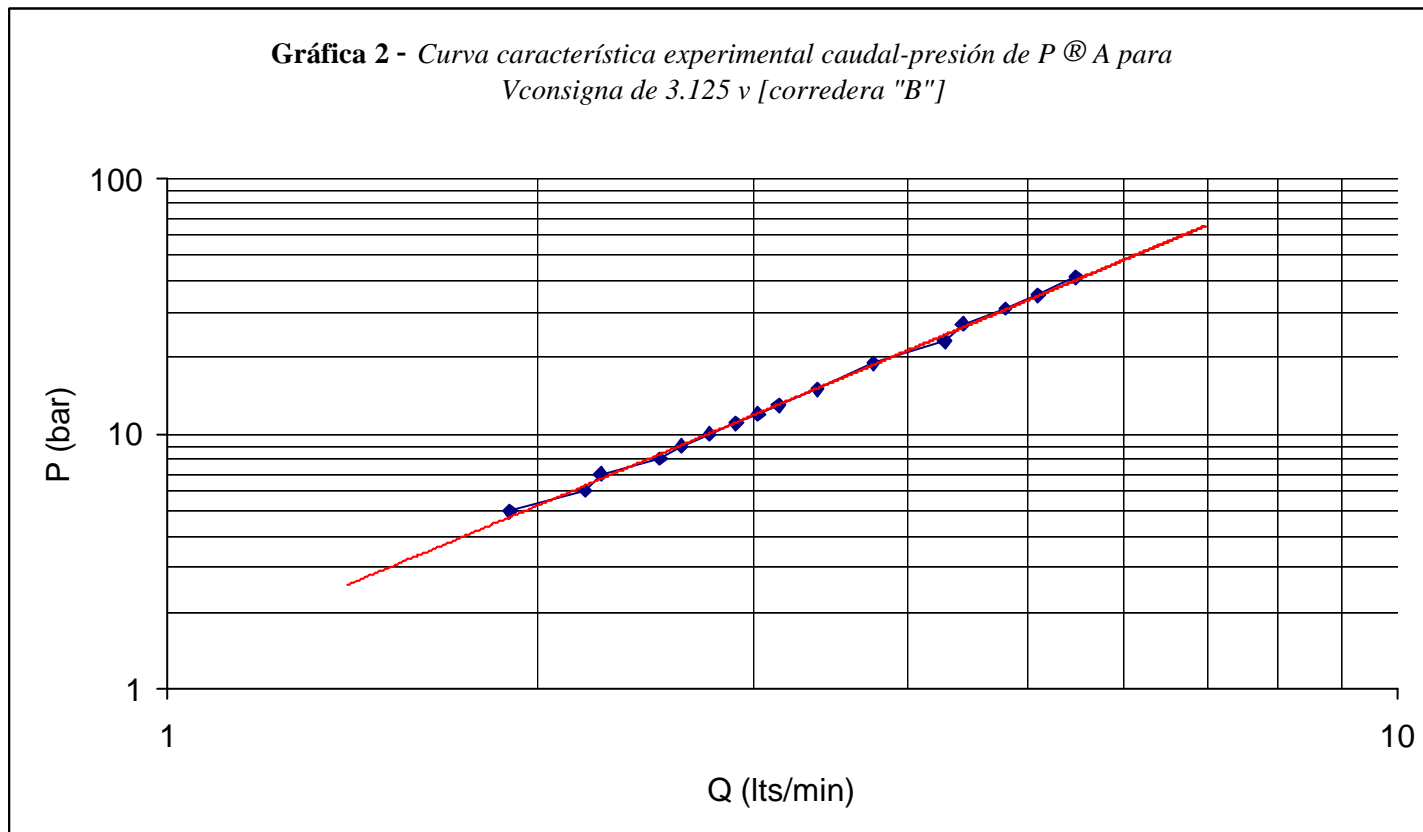


$$\Delta P = 0.0357Q^{2.0424}$$

Q (lts/min)	ΔP (bar)
9,273	3,00
10,858	5,00
11,964	6,00
13,473	7,50
14,845	9,00
15,702	10,00
16,914	11,50
18,055	13,00
19,483	15,00
20,164	16,00

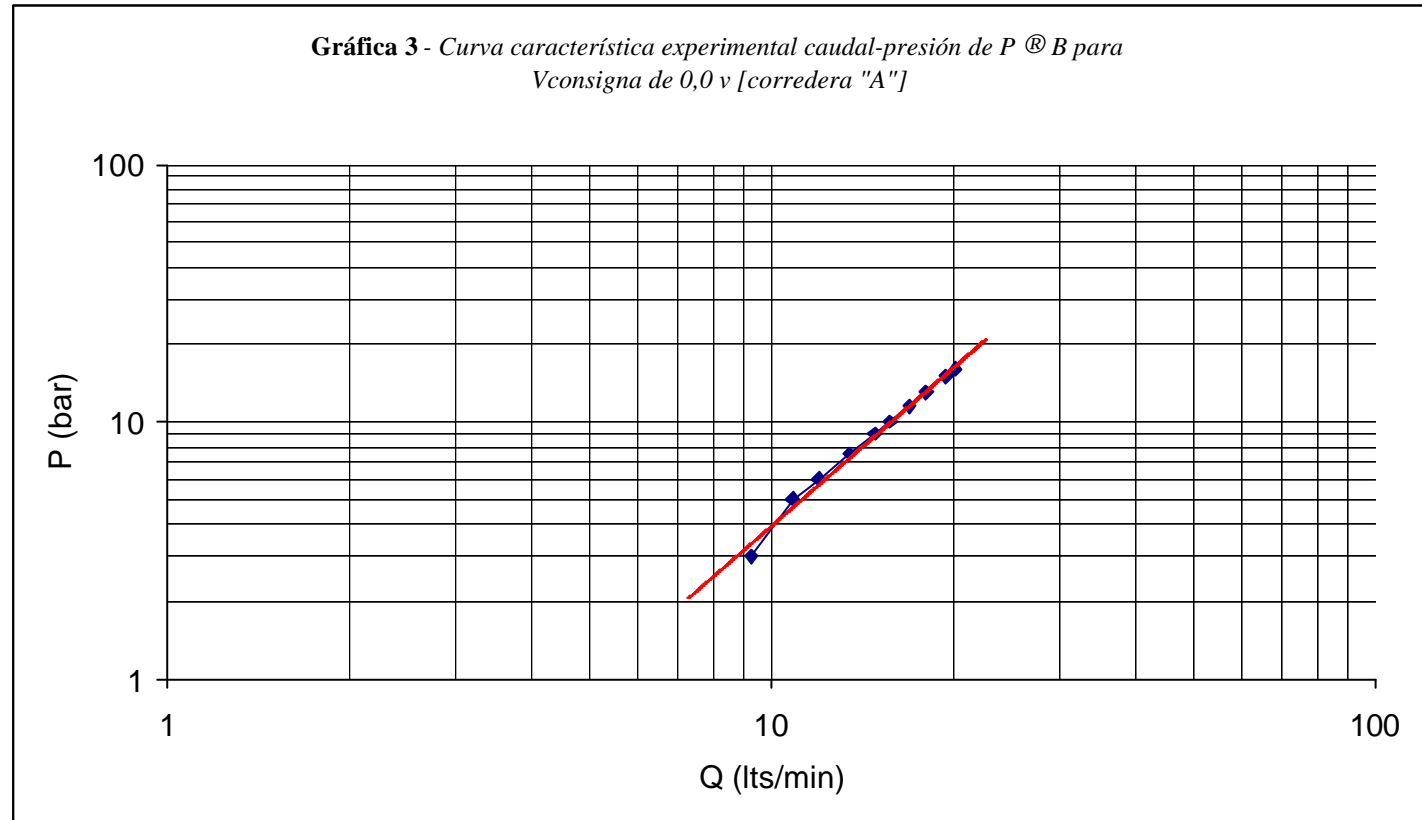


$$\Delta P = 0.0333Q^{2.0644}$$

Q (lts/min)	ΔP (bar)
7,351	2,00
8,732	3,00
10,258	4,00
10,656	4,50
11,422	5,00
12,271	6,00
12,962	6,50
13,234	7,00
14,324	8,00
14,968	9,00
15,569	9,50
16,512	11,00
17,430	12,00

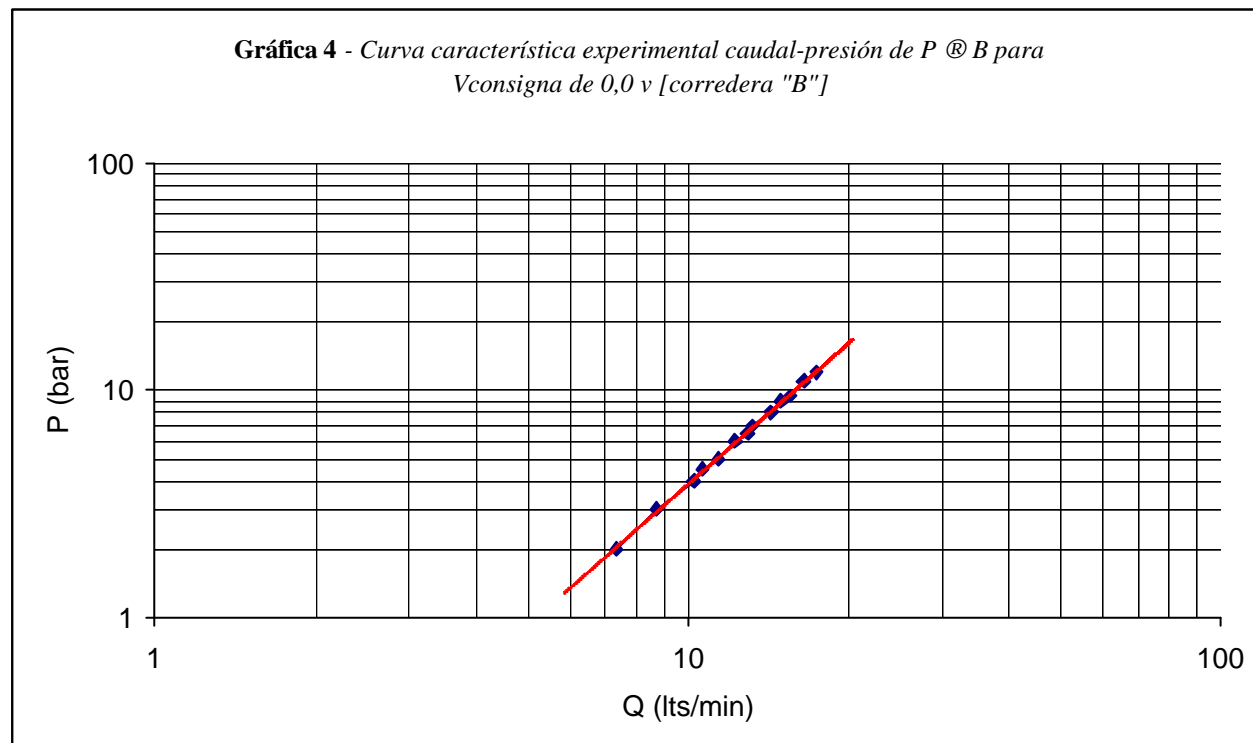


$$\Delta P = 0.041Q^{1.998}$$

Q (lts/min)	ΔP (bar)
9,090	3,50
11,141	5,00
12,729	6,50
13,963	8,00
15,182	9,50
16,111	11,00
17,221	12,00
18,020	13,50
19,050	15,00

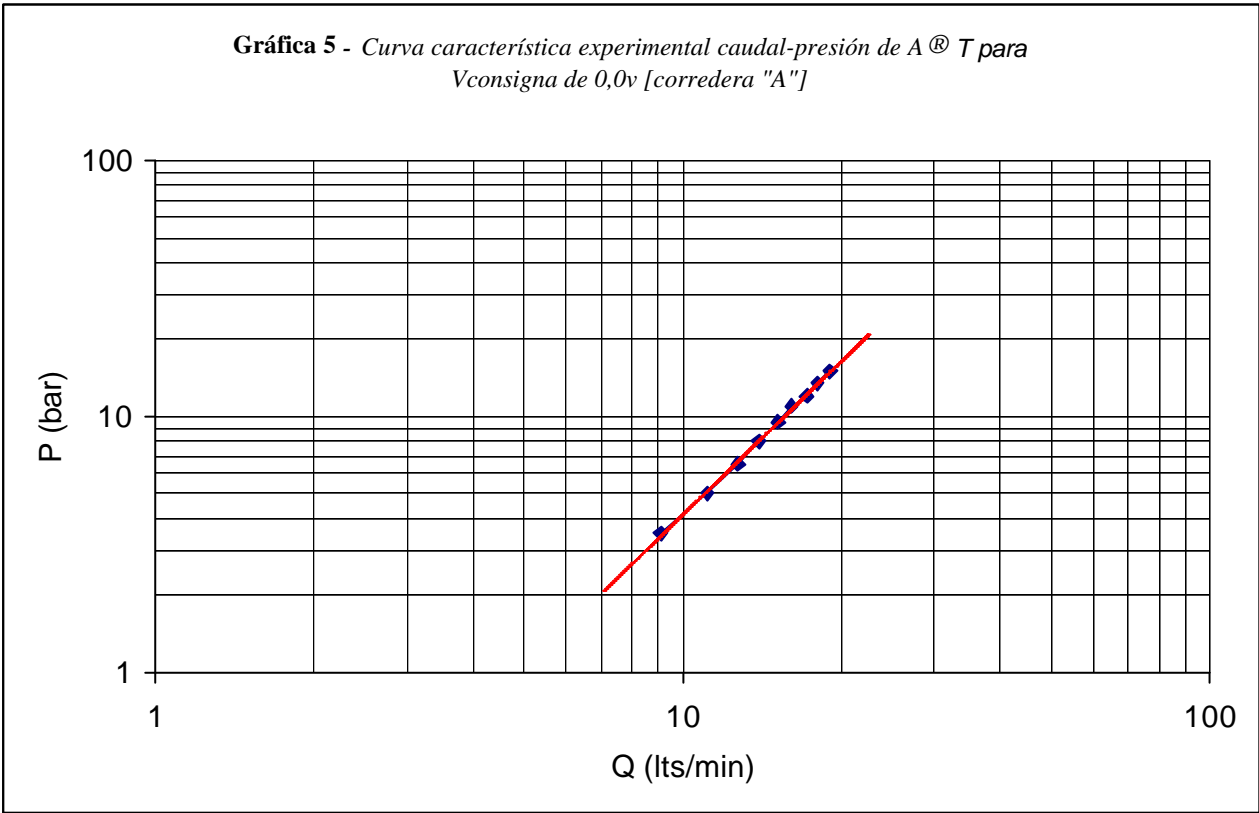


$$\Delta P = 0.0348Q^{2.091}$$

Q (lts/min)	ΔP (bar)
7,050	2,00
8,306	3,00
9,754	4,00
10,050	4,50
10,849	5,00
11,154	5,50
12,326	6,50
12,569	7,00
13,578	8,00
13,800	8,50
14,500	9,50
15,463	10,50
16,283	12,00
17,405	13,40
18,430	15,50

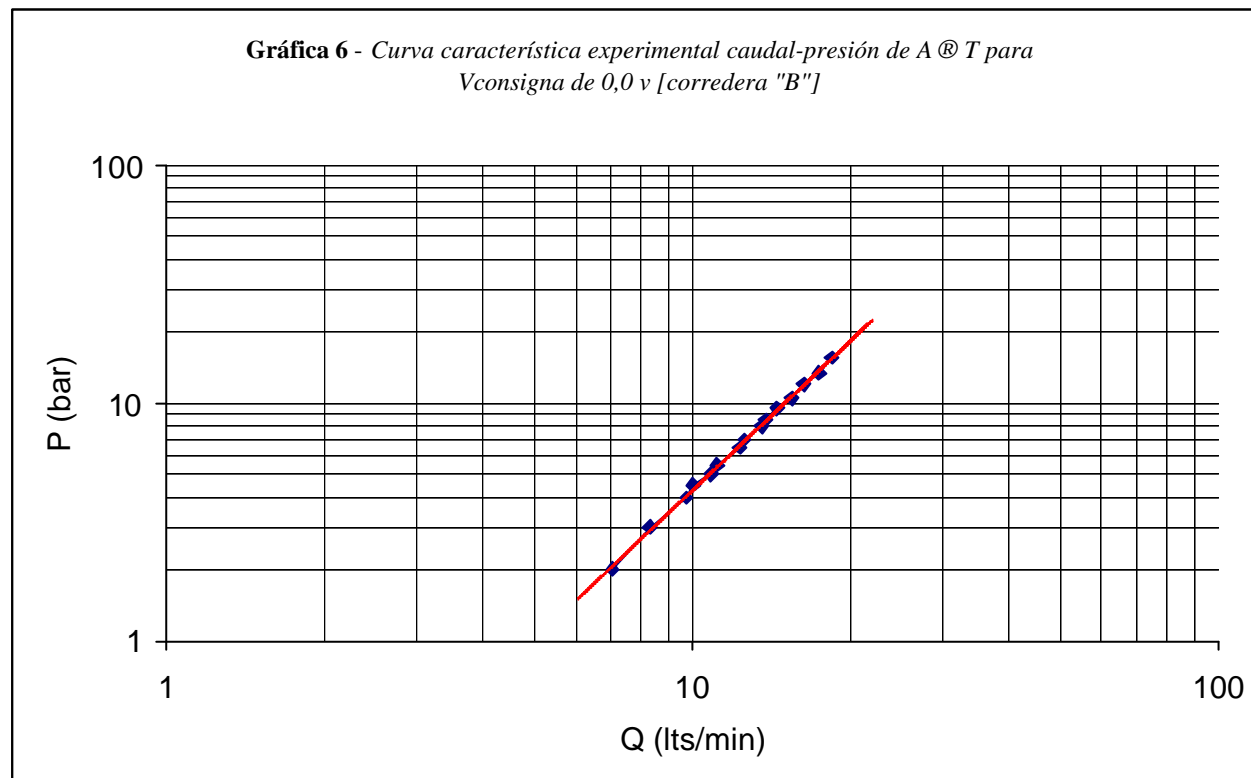

$$\Delta P = 0.436Q^{2.0128}$$

Q (lts/min)	ΔP (bar)
3,777	6,00
4,650	10,00
5,550	14,00
6,390	18,00
6,950	22,00
7,513	26,00
8,073	30,00
8,597	34,00
9,390	38,00
9,859	42,00

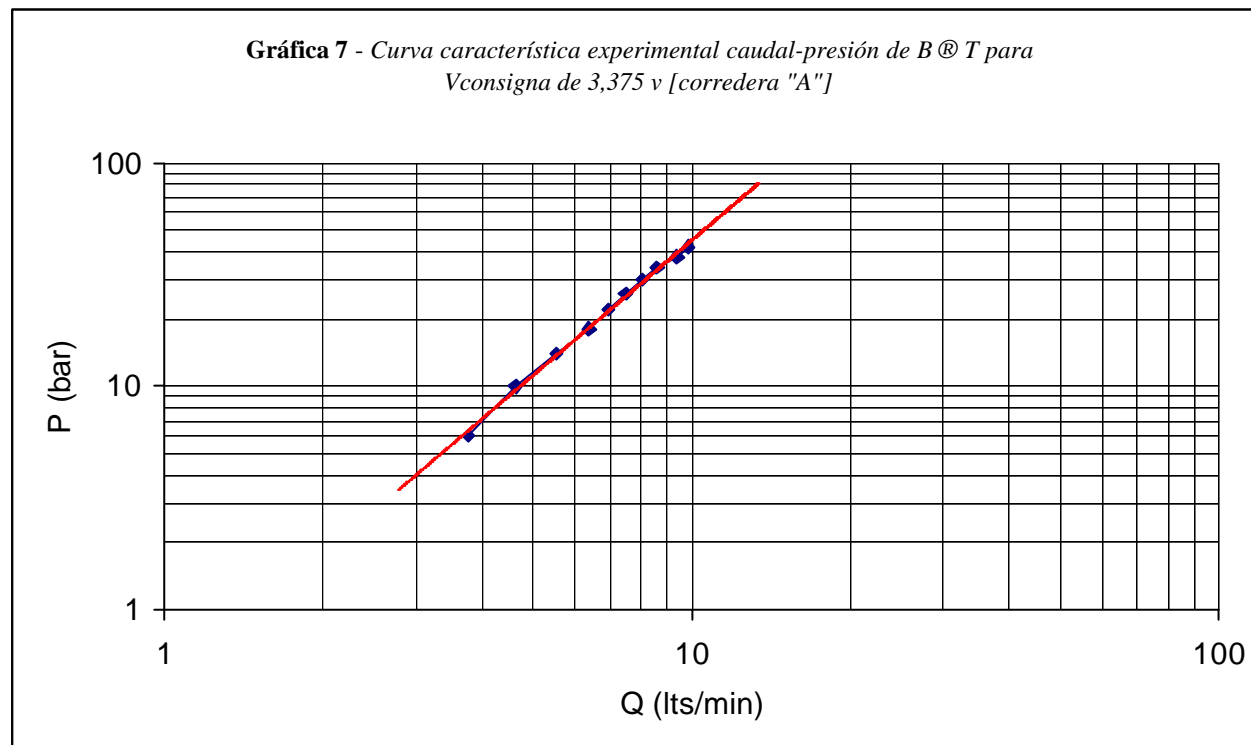

$$\Delta P = 0.3318Q^{2.063}$$

Q (lts/min)	ΔP (bar)
3,263	4,00
3,831	5,00
4,007	6,00
4,473	7,00
4,768	8,00
4,935	9,00
5,288	10,00
5,327	11,00
5,755	12,00
5,873	13,00
6,285	15,00
6,668	17,00
7,129	19,00
7,794	23,00
8,400	27,00
8,893	30,50
9,621	34,50
10,018	38,50

