


EJEMPLOS DE CURVES CARACTERÍSTICAS EXPERIMENTALES DE SUBCOMPONENTES BÁSICOS LA VÁLVULA DE SINCRONIZACIÓN


$$\Delta P = 0.6 + 0.0121Q^{1.9933}$$

Q (lts/min)	ΔP (bar)
10,840	1,40
12,358	1,90
14,940	2,65
16,129	2,90
17,316	3,40
18,838	4,15
19,418	4,90

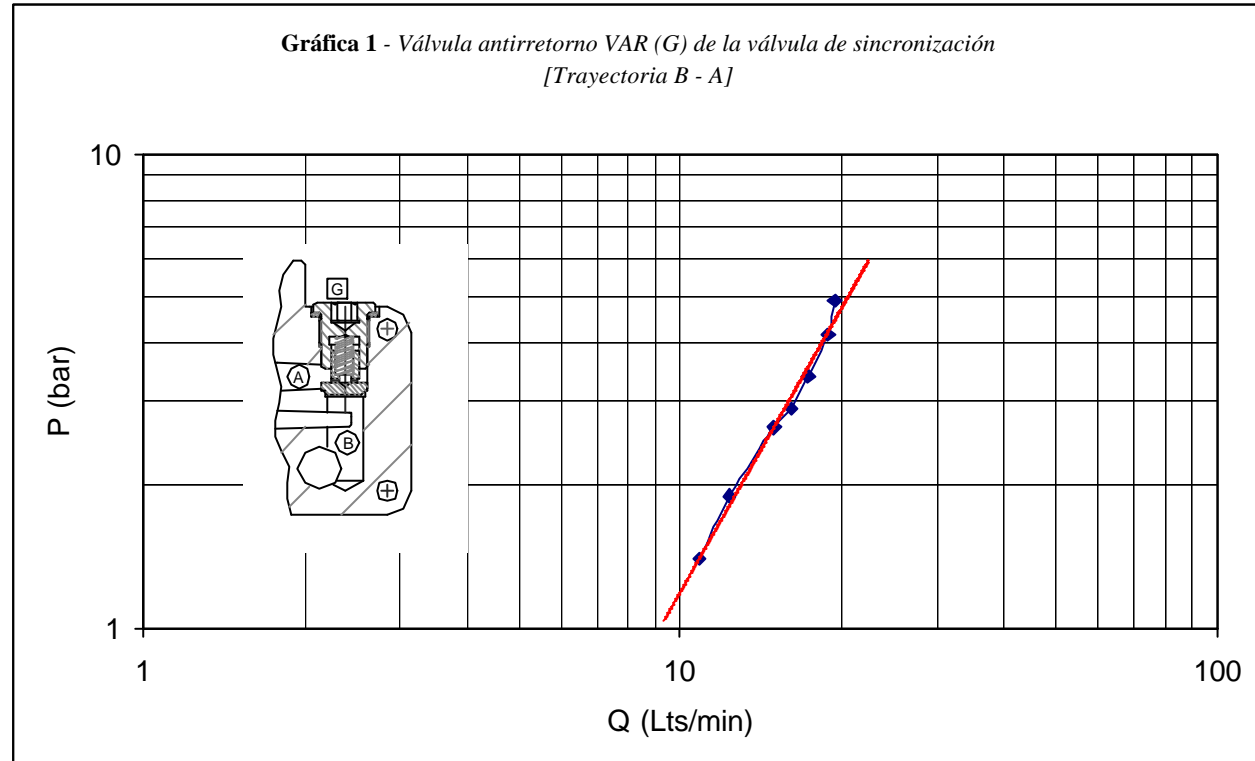

$$\Delta P = 0.0271Q^{2.0156}$$

Q (lts/min)	ΔP (bar)
9,224	2,25
10,471	3,00
11,684	4,00
12,820	5,00
14,239	5,75
14,870	6,50
15,132	6,50
15,973	7,25
16,772	8,00
18,181	9,00
18,500	9,75
19,169	10,00

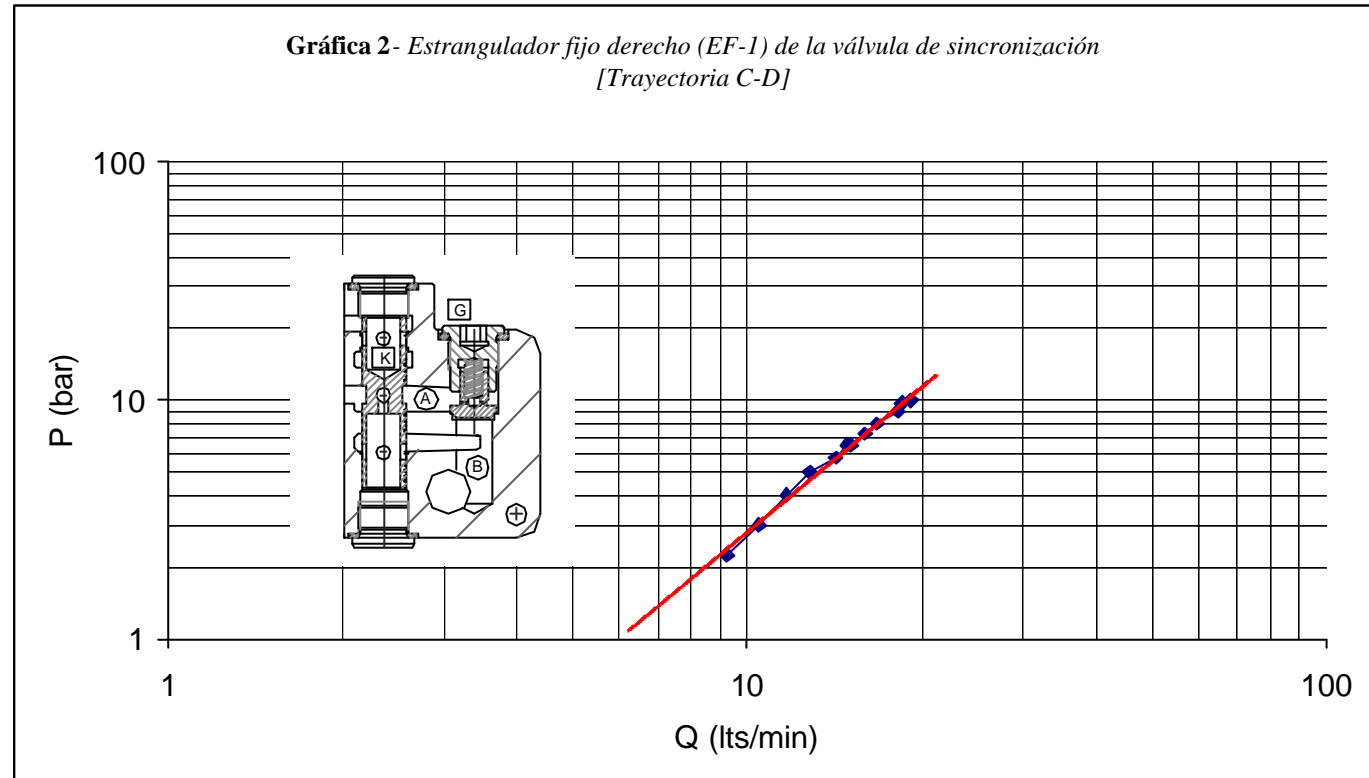

$$\Delta P = 0.1697Q^{2.0047}$$

Q (lts/min)	ΔP (bar)
5,271	4,50
5,609	5,50
5,960	6,00
6,332	7,00
6,772	8,00
7,184	8,75
7,383	9,50
7,763	10,50
8,137	11,25
8,389	12,25
8,971	14,00
9,594	16,00
10,379	18,00
11,295	21,75
12,227	25,50
12,580	27,00

